



Radio hand-held scanner BCS 370^{ex} for 1D-Barcodes

Description

As innovative as it is rugged, the wireless radio hand-held scanner BCS 370^{ex} from BARTEC delivers the sophisticated ergonomic and operational features industrial applications demand.

The radio hand-held scanner BCS 370^{ex} is able to easily read all conventional 1D-barcodes. Via the key pad, alphanumerical data can be entered and presented on the display.

The radio hand-held scanner BCS 370^{ex} is equipped with a license-independent software, which offers the user the possibility of manually entering alphanumerical data, scanning all conventional 1D-barcodes and transferring them online via radio to the host system for evaluation and further processing. The BCS 370^{ex} has a robust housing, an internal shock absorber and an ultrasonic welded window.

This means that the BCS 370^{ex} is suitable for the hardest industrial conditions. With these measures the scanner can withstand a drop to concrete of 1.8 m.

Features

- Insensitive to direct exposure to normal factory lighting
- High level of impact resistance - robust
- All common barcodes readable
- 35 scans per second
- Free movement during data acquisition, up to a distance of 30 m from the radio receiving station

Design

The BCS 370^{ex} radio hand-held scanner with integrated decoder has been designed for wireless real-time data acquisition and allows for a highly efficient operation in production halls, warehouses and other application sites.

During data acquisition, the user is able to freely move within a distance of up to 30 m around the radio receiving station. The BCS 370^{ex} radio hand-held scanner features the intrinsic safety type of protection and can be directly applied in hazardous areas of zone 1 or 2.

Base Station

The charging station (cradle) serves, at the same time, as radio receiving station and is installed in non-hazardous areas. By means of a RS232 cable, the base station can be connected to all conventional hosts.

Explosion protection

Ex protection type

Ex II 2G Ex ib IIC T4

Certification

IBEXU 04 ATEX 1060

Technical data

Ambient temperature

-20 °C to +40 °C

-4 °F to +104 °F

Storage temperature

-20 °C to +70 °C

-4 °F to +158 °F

Charging temperatures

0 °C to +40 °C

+32 °F to +104 °F

Keyboard version

17 keys (numeric and switchable alphabetic keys)

Display

2 lines, each with 20 characters

Scan rate

35 scans per second

Scan angle

42° ± 2°

Light source

650 nm laser diode

Scan element type

Retro-collective

Radio specifications

Radio range

max. 30 m

side-by-side with existing

Spectrum24 systems

Frequency

2.4 GHz point-to-point narrow band,

82 user-selectable channels

Output power

< 10 mW

Weight

approx. 400 g (approx. 14.1 oz)

Humidity

5 % to 95 % (non-condensing)

Dimensions (height x length x width)

173 mm x 150 mm x 74 mm

6.8 inch x 5.9 inch x 2.9 inch

Protection class

IP 54

Power supply

3.6 V/1100 mAh Li-ion battery

BARTEC Type: 17-21BE-0008

Order no.

BCS 370^{ex}


17-21BA-0021

including Li-ion batterie (1 piece)

Technical data subject to change without notice. Note: All variants without accessories. You will find the accessories with order details on the accessories pages.

Connection possibility

Safe area

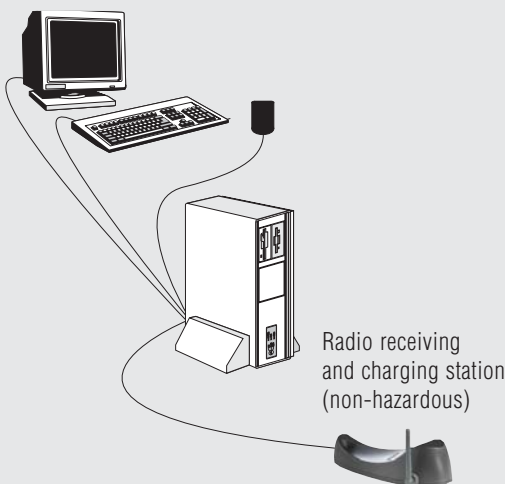

Radio receiving and charging station (non-hazardous)



Radio hand-held scanner BCS 370^{ex}