


AWK-4121 Series

Industrial IEEE 802.11a/b/g IP68 wireless AP/bridge/client



- > IEEE 802.11a/b/g compliant
- > Redundant 24 VDC power inputs or PoE
- > QoS (WMM) and VLAN for efficient network traffic
- > Supports long-distance data transfer and 100 ms Turbo Roaming
- > Compliant with essential sections of EN 50155
- > Rugged IP68-rated housing and -40 to 75°C operating temperature



Introduction

The AWK-4121 outdoor wireless AP/bridge/client is the ideal outdoor wireless solution for industrial applications that are hard to wire, too expensive to wire, or use mobile equipment that connect to a TCP/IP network. The AWK-4121's dust-tight/weatherproof design is IP68-rated, allowing you to extend existing wired networks to outdoor locations and critical environments. The two redundant DC power inputs increase the reliability of the power supply and can be powered via PoE for easier deployment. The AWK-4121 is compliant with the essential sections of EN 50155, covering operating temperature, power input voltage, surge, ESD and vibration. and with so many hardened industrial-grade features, you can rest assured that the AWK-4121 will provide stable and reliable wireless connectivity, even in the harshest locations.

Industrial and Outdoor Rated Features for Critical Environments

- IP68-rated metal housing and -40 to 75°C wide operating temperature
- Anti-vibration M12 design and waterproof/dust-tight RJ45 connectors
- PoE and dual DC power inputs

Specifications for Industrial-grade Applications

- Long-distance wireless transmission over 10 km
- Integrated DI/DO for on-site monitoring and warnings
- Status LED indicators for on-site monitoring and diagnosis

Specifications

WLAN Interface

Standards:

IEEE 802.11a/b/g for Wireless LAN
 IEEE 802.11i for Wireless Security
 IEEE 802.3 for 10BaseT
 IEEE 802.3u for 100BaseT(X)
 IEEE 802.3af for Power-over-Ethernet
 IEEE 802.1D for Spanning Tree Protocol
 IEEE 802.1w for Rapid STP
 IEEE 802.1Q for VLAN

Spread Spectrum and Modulation (typical):

- DSSS with DBPSK, DQPSK, CCK
- OFDM with BPSK, QPSK, 16QAM, 64QAM
- 802.11b: CCK @ 11/5.5 Mbps, DQPSK @ 2 Mbps, DBPSK @ 11 Mbps
- 802.11a/g: 64QAM @ 54/48 Mbps, 16QAM @ 36/24 Mbps, QPSK @ 18/12 Mbps, BPSK @ 9/6 Mbps

Operating Channels (central frequency):

US:

2.412 to 2.462 GHz (11 channels)

5.18 to 5.24 GHz (4 channels)

EU:

2.412 to 2.472 GHz (13 channels)

5.18 to 5.24 GHz (4 channels)

JP:

2.412 to 2.472 GHz (13 channels, OFDM)

2.412 to 2.484 GHz (14 channels, DSSS)

5.18 to 5.24 GHz (4 channels for W52)

Security:

- SSID broadcast enable/disable
- Firewall for MAC/IP/Protocol/Port-based filtering
- 64-bit and 128-bit WEP encryption, WPA/WPA2 Personal and Enterprise (IEEE 802.1X/RADIUS, TKIP and AES)

Transmission Rates:

802.11b: 1, 2, 5.5, 11 Mbps

802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps

TX Transmit Power (for hardware revision 1.1):

802.11b:

Typ. 23±1.5 dBm @ 1 to 11 Mbps

802.11g:

Typ. 20±1.5 dBm @ 6 to 24 Mbps, Typ. 19±1.5 dBm @ 36 Mbps, Typ.

18±1.5 dBm @ 48 Mbps, Typ. 17±1.5 dBm @ 54 Mbps

802.11a:

Typ. 18±1.5 dBm @ 6 to 24 Mbps, Typ. 16±1.5 dBm @ 36 to 48 Mbps,

Typ. 15±1.5 dBm @ 54 Mbps

RX Sensitivity (for hardware revision 1.1):

802.11b:

-97 dBm @ 1 Mbps, -94 dBm @ 2 Mbps, -92 dBm @ 5.5 Mbps, -90 dBm @ 11 Mbps

802.11g:

-93 dBm @ 6 Mbps, -91 dBm @ 9 Mbps, -90 dBm @ 12 Mbps, -88 dBm @ 18 Mbps, -84 dBm @ 24 Mbps, -80 dBm @ 36 Mbps, -76 dBm @ 48 Mbps, -74 dBm @ 54 Mbps

802.11a:

-90 dBm @ 6 Mbps, -89 dBm @ 9 Mbps, -89 dBm @ 12 Mbps, -85 dBm @ 18 Mbps, -83 dBm @ 24 Mbps, -79 dBm @ 36 Mbps, -75 dBm @ 48 Mbps, -74 dBm @ 54 Mbps

TX Transmit Power (for hardware revision 1.0):

802.11b:

Typ. 18±1.5 dBm @ 1 to 11 Mbps

802.11g:

Typ. 18±1.5 dBm @ 6 to 24 Mbps, Typ. 16±1.5 dBm @ 36 to 48 Mbps, Typ. 15±1.5 dBm @ 54 Mbps

802.11a:

Typ. 16±1.5 dBm @ 6 to 24 Mbps, Typ. 14±1.5 dBm @ 36 to 48 Mbps, Typ. 13±1.5 dBm @ 54 Mbps

RX Sensitivity (for hardware revision 1.0):

802.11b:

-92 dBm @ 1 Mbps, -90 dBm @ 2 Mbps, -88 dBm @ 5.5 Mbps, -84 dBm @ 11 Mbps

802.11g:

-87 dBm @ 6 Mbps, -86 dBm @ 9 Mbps, -85 dBm @ 12 Mbps, -82 dBm @ 18 Mbps, -80 dBm @ 24 Mbps, -76 dBm @ 36 Mbps, -72 dBm @ 48 Mbps, -70 dBm @ 54 Mbps

802.11a:

-87 dBm @ 6 Mbps, -86 dBm @ 9 Mbps, -85 dBm @ 12 Mbps, -82 dBm @ 18 Mbps, -80 dBm @ 24 Mbps, -76 dBm @ 36 Mbps, -72 dBm @ 48 Mbps, -70 dBm @ 54 Mbps

Protocol Support

General Protocols: Proxy ARP, DNS, HTTP, HTTPS, IP, ICMP, SNMP, TCP, UDP, RADIUS, SNMP, PPPoE, DHCP

AP-only Protocols: ARP, BOOTP, DHCP, STP/RSTP (IEEE 802.1D/w)

Interface

Default Antennas: 2 dual-band omni-directional antennas, 5 dBi at 2.4 GHz, 2 dBi at 5 GHz, N-type (male)

Connector for External Antennas: N-type (female)

RJ45 Ports: 1, 10/100BaseT(X), auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection

Console Port: RS-232 (waterproof RJ45-type)

LED Indicators: PWR, FAULT, STATE, WLAN, LAN

Alarm Contact (digital output, M12 female connector): 1 relay output with current carrying capacity of 1 A @ 24 VDC

Digital Inputs (M12 female connector): 2 electrically isolated inputs

- +13 to +30 V for state "1"

- +3 to -30 V for state "0"

- Max. input current: 8 mA

Physical Characteristics

Housing: Metal, IP68 protection

Weight: 1.5 kg

Dimensions: 224 x 147.7 x 64.5 mm (8.82 x 5.82 x 2.54 in)

Installation: Wall mounting (standard), DIN-Rail mounting (optional), pole mounting (optional)

Environmental Limits

Operating Temperature: -40 to 75°C (-40 to 167°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5% to 100% (non-condensing)

Power Requirements

Input Voltage: 12 to 48 VDC, redundant dual DC power inputs or 48 VDC Power-over-Ethernet (IEEE 802.3af compliant)

*Compliant with EN 50155 on 24 VDC

Connector: M12 male connector with A-coding

Power Consumption:

- 12 to 48 VDC, 0.121 to 0.494 A

- 24 VDC, 0.3 A

Reverse Polarity Protection: Present

Standards and Certifications

Safety: UL 60950-1, EN 60950-1

Hazardous Location: UL/cUL Class I Division 2, ATEX Zone 2 (Pending)

EMC: EN 301 489-1/17, FCC Part 15 Subpart B, EN 55022/55024

Radio: EN 300 328, EN 301 893, DSPR (Japan)

Rail Traffic: EN 50155, EN 50121-1/4

Note: Please check Moxa's website for the most up-to-date certification status.

Reliability


MTBF (mean time between failures): 364,564 hrs

Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

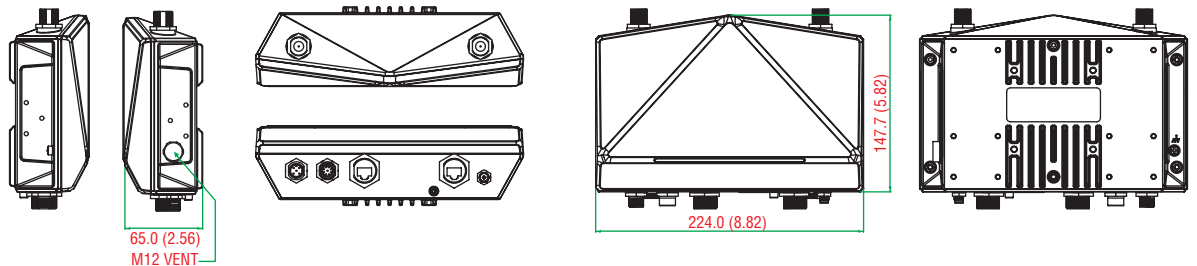

Ordering Information

Available Models

AWK-4121-US-T: IEEE 802.11a/b/g IP68 wireless AP/bridge/client, US band, -40 to 75°C operating temperature

AWK-4121-EU-T: IEEE 802.11a/b/g IP68 wireless AP/bridge/client, EU band, -40 to 75°C operating temperature







AWK-4121-JP-T: IEEE 802.11a/b/g IP68 wireless AP/bridge/client, JP band, -40 to 75°C operating temperature







Note: Please visit Moxa's website for a complete list of optional wireless accessories and antennas available for Moxa's wireless products.

Package Checklist












- AWK-4121 wireless AP/bridge/client
- 2 omni-directional antennas (5/2 dBi, N-type male, 2.4/5 GHz)
- Wall mounting kit (includes 2 supports)
- Field-installable power plug
- Field-installable RJ45 plug
- Metal cap to cover M12-female connector
- Metal cap to cover RJ45 connector
- Transparent plastic sticks for field-installable plugs
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card



Wireless Antenna Selection Guide

	IEEE 802.11b/g 2.4 GHz Wireless Antennas				IEEE 802.11a 5 GHz Wireless Antennas	
						
	ANT-WSB-AHRM-05-1.5m	ANT-WSB-ANF-09	ANT-WSB-PNF-12	ANT-WSB-PNF-18	ANT-WSB5-ANF-12	ANT-WSB5-PNF-18
Frequency Range	2.4 to 2.5 GHz				5.1 to 5.9 GHz	
Antenna Type	$\lambda/4$ Dipole	Omni-directional	Directional, Panel	Directional, Panel	Omni-directional	Directional, Panel
Typical Antenna Gain	5 dBi	9 dBi	12 dBi	18 dBi	12 dBi	18 dBi
Description	2.4 GHz, omni-directional/dipole antenna, 5 dBi	2.4GHz, omni-directional antenna, 9 dBi, N-type (female)	2.4 GHz, panel antenna, 12 dBi, N-type (female)	2.4 GHz, panel antenna, 18 dBi, N-type (female)	5 GHz, omni-directional antenna, 12 dBi, N-type (female)	5 GHz, panel antenna, 18 dBi, N-type (female)
Impedance	50 \pm 5 ohms	50 \pm 5 ohms	50 \pm 5 ohms	50 \pm 5 ohms	50 \pm 5 ohms	50 \pm 5 ohms
Polarization	Vertical	Linear	Linear	Linear	Linear	Linear
HPBW/Horizontal	360°	360°	50°	30°	360°	10°
HPBW/Vertical	—	10°	30°	20°	6°	10°
V.S.W.R.	2.0	1 : 1.3 Max.	1 : 1.5 Max.	1 : 1.5 Max.	1 : 1.3 Max.	1 : 1.5 Max.
Power Handling	—	15 W Max.	10 W Max.	15 W Max.	10 W Max.	10 W Max.
Connector(s)	RP-SMA (male)	N-type (female)	N-type (female)	N-type (female)	N-type (female)	N-type (female)
Operating Temperature	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C
IP rating	—	IP65	IP65	IP65	IP65	IP65
Antenna Profile	—	420 mm length	215 x 90 x 30 mm	270 x 205 x 15 mm	420 mm length	270 x 205 x 15 mm
Weight	300 g	430 g	560 g	310 g	430 g	990 g
Related Products	AWK-1121/1127, AWK-3121, AWK-3121-SSC, AWK-3131, AWK-5222, AWK-5232, NPort W2150/2250 Plus, NPort W2004 AWK-1121/1127, AWK-3121, AWK-3131, AWK-4121, AWK-4131, AWK-5222, AWK-5232, AWK-6222, AWK-6232, NPort W2150/2250 Plus, NPort W2004					

	IEEE 802.11a/b/g 2.4/5 GHz Dual-band Antennas					
						
	ANT-WDB-ANM-0502	ANT-WDB-ANM-0407	ANT-WDB-ANF-0407	ANT-WDB-ANM-0609	ANT-WDB-ANF-0609	ANT-WDB-PNF-1518
Frequency Range	2.4 to 2.5 / 5.1 to 5.9 GHz					
Antenna Type	Omni-directional	Omni-directional	Omni-directional	Omni-directional	Omni-directional	Directional, Panel
Typical Antenna Gain	2/5 dBi	4/7 dBi	4/7 dBi	6/9 dBi	6/9 dBi	15/18 dBi
Description	2.4/5 GHz, dual-band omni-directional antenna, 2/5 dBi, N-type (male)	2.4/5 GHz, dual-band omni-directional antenna, 4/7 dBi, N-type (male)	2.4/5 GHz, dual-band omni-directional antenna, 4/7 dBi, N-type (female)	2.4/5 GHz, dual-band omni-directional antenna, 6/9 dBi, N-type (male)	2.4/5 GHz, dual-band omni-directional antenna, 6/9 dBi, N-type (female)	2.4/5 GHz, dual-band panel antenna, 15/18 dBi, N-type (female)
Impedance	50 \pm 5 ohms	50 \pm 5 ohms	50 \pm 5 ohms	50 \pm 5 ohms	50 \pm 5 ohms	50 \pm 5 ohms
Polarization	Linear	Linear	Linear	Linear	Linear	Linear
HPBW/Horizontal	360°	360°	360°	360°	360°	50/10°
HPBW/Vertical	65°	10/8°	10/8°	10/8°	10/8°	30/10°
V.S.W.R.	1 : 2.0 Max.	1 : 1.5 Max.	1 : 1.5 Max.	1 : 1.5 Max.	1 : 1.5 Max.	1 : 1.5 Max.
Power Handling	2 W Max.	10 W Max.	10 W Max.	10 W Max.	10 W Max.	20 W Max.
Connector(s)	N-type (male)	N-type (male)	N-type (female)	N-type (male)	N-type (female)	N-type (female)
Operating Temperature	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C	-40 to 80°C
IP rating	IP67	IP65	IP65	IP65	IP65	IP65
Antenna Profile	220 mm length	220 mm length	260 mm length	632 mm length	660 mm length	270 x 205 x 15 mm
Weight	72 g	115g	155 g	238 g	286 g	1020 \pm 10 g
Related Products	AWK-4121, AWK-4131, AWK-6222, AWK-6232 AWK-1121/1127, AWK-3121, AWK-3131, AWK-4121, AWK-4131, AWK-5222, AWK-5232, AWK-6222, AWK-6232, NPort W2150/2250 Plus, NPort W2004 AWK-4121, AWK-4131, AWK-6222, AWK-6232 AWK-1121/1127, AWK-3121, AWK-3131, AWK-4121, AWK-4131, AWK-5222, AWK-5232, AWK-6222, AWK-6232, NPort W2150/2250 Plus, NPort W2004					

Wireless Accessories Selection Guide

Cables											
											
	CRF-N0117SA-3M	CRF-N0429N-3M	A-CRF-NMNM-LL4-300	A-CRF-NMNM-LL4-600	A-CRF-NMNM-LL4-900	A-CRF-RMNM-L1-300	A-CRF-RMNM-L1-600	A-CRF-RMNM-L1-900	A-CRF-RFRM-S1-060	A-CRF-QMAMNM-R2-50	A-CRF-RFQMAM-R2-50
	CFD200 cable, N-type (male) to RP SMA (male), 3 m	CFD400 cable, N-type (male) to N-type (male), 3 m	LMR-400 Lite cable, N-type (male) to N-type (male), 3 m	LMR-400 LITE cable, N-type (male) to N-type (male), 6 m	LMR-400 LITE cable, N-type (male) to N-type (male), 9 m	LMR-195 Lite cable, N-type (male) to RP SMA (male), 3 m	LMR-195 Lite cable, N-type (male) to RP SMA (male), 6 m	LMR-195 Lite cable, N-type (male) to RP SMA (male), 9 m	S141 cable, RP-SMA (male) to RP-SMA (female), 0.6 m	RG316 cable, QMA (male) to N-type (male)	RG316 cable, QMA (male) to RP-SMA (female)
Cable Type	CFD200	CFD400	LMR-400 Lite	LMR-400 Lite	LMR-400 Lite	LMR-195 Lite	LMR-195 Lite	LMR-195 Lite	S141	RG316	RG316
Connector Type	N-type male to RP SMA male	N-type male to N-type male	N-type male to N-type male	N-type male to N-type male	N-type male to N-type male	N-type male to RP SMA male	N-type male to RP SMA male	N-type male to RP SMA male	RP-SMA male to RP-SMA female	QMA male to N-type male	QMA male to RP-SMA female
Cable Length	3 m	3 m	3 m	6 m	9 m	3 m	6 m	9 m	0.6 m	0.5 m	0.5 m
Outer Dimension	5 mm	10.3 mm	10.29 mm	10.29 mm	10.29 mm	4.95 mm	4.95 mm	4.95 mm	5 mm	2.54 mm	2.54 mm
Min. Bend Radius	12.7 mm	24.5 mm	25.4 mm	25.4 mm	25.4 mm	12.7 mm	12.7 mm	12.7 mm	12.7 mm	15 mm	15 mm
	55.4@2.5 GHz 86.5@5.8 GHz	22.2@2.5 GHz 35.5@5.8 GHz		22.2@2.5 GHz 35.5@5.8 GHz	22.2@2.5 GHz 35.5@5.8 GHz	62.4@2.5 GHz 98.1@5.8 GHz	62.4@2.5 GHz 98.1@5.8 GHz	62.4@2.5 GHz 98.1@5.8 GHz	75.4@3 GHz 98.4@5 GHz	206@2.4 GHz 345@6 GHz	206@2.4 GHz 345@6 GHz
Related Products	AWK-	AWK-4121, AWK-4131, AWK-6222, AWK-6232-M12				AWK-1121/1127, AWK-3121, AWK-3121-SSC, AWK-3131, AWK-5222, AWK-5232				AWK-3121-M12, AWK-3131-M12, AWK-5222-M12, AWK-5232-M12	

Termination Resistors		
		
	A-TRM-50-NM	A-TRM-50-RM
Description	Termination resistor, 50 ohms, N-type (male)	Termination resistor, 50 ohms, RP-SMA (male)
Related Products	AWK-4121, AWK-4131, AWK-6222, AWK-6232	AWK-1121/1127, AWK-3121, AWK-3121-SSC, AWK-3131, AWK-5222, AWK-5232

Power Amplifiers



	A-WPA-2410gM-IDU	A-WPA-5410aM-IDU
Description	Wireless power amplifier	Wireless power amplifier
Signal Type	2.4 GHz band antenna (included)	5 GHz band antenna (included)
Connector Type	RP-SMA connector	RP-SMA connector
Power Output	1 W	1 W
Power Consumption	12 VDC	12 VDC
Power Cable	Power plug to power jack cable (included)	Power plug to power jack cable (included)
Dimensions	92 x 60 x 31 mm	92 x 60 x 31 mm
Related Accessories	<ul style="list-style-type: none"> N-type male to RP-SMA male cable RP-SMA male to RP-SMA female cable 	<ul style="list-style-type: none"> N-type male to RP-SMA male cable RP-SMA male to RP-SMA female cable
Related Products	AWK-1121/1127, AWK-3121, AWK-3121-SSC, AWK-3131, AWK-5222, AWK-5232	AWK-1121/1127, AWK-3121, AWK-3121-SSC, AWK-3131, AWK-5222, AWK-5232

Arrestors



	A-SA-NMNF-01
Frequency	0-6 GHz
Connector Type	N-type female to N-type male
Related Products	AWK-1121/1127, AWK-3121, AWK-3131, AWK-4121, AWK-4131, AWK-5222, AWK-6222

Adaptors



	A-ADP-RJ458P-DB9F-ABC01	A-ADP-QMAM-RF
Description	RJ45-to-DB9 adaptor for the ABC-01	QMA(male) to RP-SMA (female) adaptor for antenna
Related Products	All AWK series	AWK-3121-M12, AWK-3131-M12, AWK-5222-M12, AWK-5232-M12

Note: The actual product may vary in physical appearance, but the functionality will be the same.