

General Specifications

XS550
Temperature Measurement Module

Sushi Sensor

GS 01W06F02-01EN

■ GENERAL

This General Specifications (GS) describes the specifications for Temperature Measurement Module.

The XS550 Temperature Measurement Module converts thermocouple electromotive force to temperature value. This product acts as wireless temperature sensor in combination with "XS110A Wireless Communication Module" and it is suitable for Industrial IoT (IIoT) applications. The electrical power of the XS550 Temperature Measurement Module is supplied through the XS110A.

Monitoring temperature from a remote location reduces operator rounds.

Refer to General Specifications of "XS110A Wireless Communication Module" for details of wireless.

■ FEATURE

● Temperature Sensors for Industrial IoT

In combination with XS110A Wireless Communication Module, this product module acts as a battery-powered wireless pressure sensor with an environmental resistance for industrial use. This product designs to realize easy installation for production sites. Maximum 2 inputs of IEC standard thermocouples (9 types including Type B, E, J) can be connected to the module.

● Modular Structure

The module structure enables replacing the battery without removing the measurement module from thermocouples, and it makes smooth maintenance of the sensor.

● Supporting in Hazardous Location Installation

The XS550 in combination with XS110A can be installed in Zone 1 areas, such as petrochemical plants, paint plants, steel plants, where flammable gas or vapor may exist.

● Configuration and Status Monitoring Using Smartphone

Using an Android-based smartphone with NFC (Near Field Communication) interface makes configuration and status monitoring of sensors simple and intuitive.



■ STANDARD SPECIFICATIONS

□ MEASUREMENT RANGE

Refer to Table 1

□ PERFORMANCE SPECIFICATIONS

Measurement Accuracy:

Refer to Table 1

Reference Contact Compensation Accuracy:

$\pm 1.0^{\circ}\text{C}$

Ambient Temperature Effect:

Refer to Table 2

Battery Characteristics:

Battery life is 10 years under the following conditions*.

• Ambient temperature: $23 \pm 2^{\circ}\text{C}$

• Update Time: 1 hour

* Environmental condition such as vibration may affect the battery life.

Update Time:

1 minute to 3 days

□ FUNCTIONAL SPECIFICATION

Input:

Input number and type: 2, non-insulated
Thermocouples: B, E, J, K, N, R, S, T, C

Input Signal Source Resistance:

1 k Ω or less

Zero Point Adjustment:

Conducted by Sushi Sensor App.

Diagnostic Function:

Terminal block temperature error, memory failure
Input adjustment error

□ INSTALLATION ENVIRONMENT

Ambient Temperature Limits:

Operating: -40 to 85°C (-40 to 185°F)
Storage: -40 to 85°C (-40 to 185°F)

Ambient Humidity Limits:

0 to 100% RH (non-condensation)

Temperature Gradient:

Operating: Within ± 10°C/h
Storage: Within ± 20°C/h

Altitude:

Up to 3000 m

Vibration Resistance:

0.21 mm P-P (10 to 60 Hz),
3 G (60 to 2 kHz)

Shock Resistance:

50 G 11 ms

□ REGULATORY COMPLIANCE STATEMENTS

This device satisfies the following standards.

*: Please confirm that an installation region fulfills an applicable standard. If additional regulatory information and approvals are required, contact a Yokogawa representative.

CE Conformity:

RoHS Directive:
EN50581

Other Normative Standards:

Safety: EN61010-1, EN61010-2-030 (Indoor/
Outdoor use)

EMC Directive:

EN61326-1 Class A Table 2, EN61326-2-3,
EN55011 Class A

ATEX Intrinsic Safety:

Certificate number: DEKRA 20ATEX0024 X
Applicable standards: EN IEC 60079-0:2018,
EN 60079-11:2012

Ex marking (ATEX):  II 2 (1) G Ex ib [ja Ga] IIC
T4 Gb

Ambient temperature: -40 to 75°C (-40 to 167°F)

Electrical parameters:

Interface circuit (Connector)

$U_i = 6.88 \text{ V}$, $I_i = 1.54 \text{ A}$, $P_i = 0.3 \text{ W}$, $C_i = 4.1 \mu\text{F}$,
 $L_i = 0 \mu\text{H}$

Sensor circuit (Terminals 1, 2, 3 and 4)

$U_o = 6.88 \text{ V}$, $I_o = 14 \text{ mA}$, $P_o = 25 \text{ mW}$, $C_o = 16 \mu\text{F}$,
 $L_o = 150 \text{ mH}$

Enclosure:

IP66/IP67 in accordance with only EN 60529 when
combined with XS110A.

Dielectric strength (Terminals to Enclosure):
500 V AC, r.m.s., 1 minute.

Canadian Safety Standards:

CAN/CSA-C22.2 No.61010-1
CAN/CSA-C22.2 No.61010-2-030
CSA-C22.2 No.94.2
IEC 60529
Pollution degree 2
Overvoltage category I

Degrees of Protection:

IP66/IP67, Type 4X
Apply when connected to the XS110A.

IECEx Intrinsic Safety:

Certificate number: IECEx DEK 19.0027X
Applicable standards: IEC 60079-0 Ed. 7.0 (2017),
IEC 60079-11 Ed. 6.0 (2011)
Ex marking (IECEx): Ex ib [ja Ga] IIC T4 Gb
Ambient temperature: -40 to 75°C (-40 to 167°F)
Electrical parameters:

Interface circuit (Connector)

$U_i = 6.88 \text{ V}$, $I_i = 1.54 \text{ A}$, $P_i = 0.3 \text{ W}$, $C_i = 4.1 \mu\text{F}$,
 $L_i = 0 \mu\text{H}$

Sensor circuit (Terminals 1, 2, 3 and 4)

$U_o = 6.88 \text{ V}$, $I_o = 14 \text{ mA}$, $P_o = 25 \text{ mW}$,
 $C_o = 16 \mu\text{F}$, $L_o = 150 \text{ mH}$

Enclosure:

IP66/IP67 in accordance with only IEC 60529 when
combined with XS110A.

Dielectric strength (Terminals to Enclosure):
500 V AC, r.m.s., 1 minute.

□ PHYSICAL SPECIFICATIONS

Electrical Connection:

M20 female, 1/2 NPT female

Housing:

Stainless steel

Weight:

400 g (0.88 lb)

Mounting Bracket:

Refer to "MODEL AND SUFFIX CODES."

Table 1 Sensor Type, Measurement Range, and Accuracy

Sensor Type	Standard	Measurement Range	Accuracy
T/C	IEC60584	100 to 300°C (212 to 572°F)	± 8.0°C (46°F)
		300 to 400°C (572 to 752°F)	± 3.0°C (37°F)
		400 to 1820°C (752 to 3308°F)	± 2.5°C (36.5°F)
		-200 to 1000°C (-328 to 1832°F)	± 0.6°C (33°F)
		-200 to 1200°C (-328 to 2192°F)	± 0.75°C (33.4°F)
		-200 to 1372°C (-328 to 2502°F)	± 1.5°C (34.7°F)
		-200 to 1300°C (-328 to 2372°F)	± 1°C (33.8°F)
		-50 to 100°C (-58 to 212°F)	± 3°C (37°F)
		100 to 1768°C (212 to 3214°F)	± 2°C (35.6°F)
		-50 to 1768°C (-58 to 3214°F)	± 2°C (35.6°F)
-200 to 400°C (-328 to 752°F)	± 1°C (33.8°F)		
0 to 2315°C (32 to 4199°F)	± 1.5°C (34.7°F)		

Note: Measurement Accuracy will be changed when electromagnetic noise applied.

Table 2 Effects of Ambient Temperature

Sensor Type	Temperature Effects per 1.0°C Change in Ambient Temperature	Measurement Range	
T/C	B	0.092°C – (0.032% of (t–100))	100°C ≤ t < 300°C
		0.025°C – (0.0010% of (t–300))	300°C ≤ t < 1000°C
		0.029°C	1000°C ≤ t < 1820°C
	E	0.00099°C – (0.0040% of t)	–200°C ≤ t < 0°C
		0.00099°C + (0.0019% of t)	0°C ≤ t < 1000°C
	J	0.0012°C – (0.0041% of t)	–200°C ≤ t < 0°C
		0.0012°C + (0.0019% of t)	0°C ≤ t < 1200°C
	K	0.0015°C – (0.0048% of t)	–200°C ≤ t < 0°C
		0.0015°C + (0.0023% of t)	0°C ≤ t < 1372°C
	N	0.0023°C – (0.0056% of t)	–200°C ≤ t < 0°C
		0.0023°C + (0.0019% of t)	0°C ≤ t < 1300°C
	R, S	0.013°C – (0.020% of t)	–50°C ≤ t < 0°C
		0.013°C + (0.0021% of t)	0°C ≤ t < 100°C
		0.0093°C + (0.0012% of t)	100°C ≤ t < 600°C
		0.0030°C + (0.0021% of t)	600°C ≤ t < 1768°C
	T	0.0016°C – (0.0044% of t)	–200°C ≤ t < 0°C
		0.0016°C + (0.0015% of t)	0°C ≤ t < 400°C
	C	0.0046°C + (0.0014% of t)	0°C ≤ t < 400°C
		0.00013°C + (0.0024% of t)	400°C ≤ t < 1400°C
		–0.023°C + (0.0041% of t)	1400°C ≤ t < 2000°C
–0.11°C + (0.0085% of t)		2000°C ≤ t < 2315°C	

Note1: The “t” on Table 2 means the value of the reading in °C.

MODEL AND SUFFIX CODES

Model	Suffix Codes	Description
XS550		Temperature Measurement Module
Inter-module communication	-A	Digital communication for XS-series
Area	2	Europe EU868
	3	North America US915
	4	Southeast Asia AS923
Type	00	General purpose*1
	K2	ATEX intrinsic safety*2
	S2	IECEx intrinsic safety*3
—	-A	Always A
Housing material	6	Stainless Steel
Electrical connection	2	1/2 NPT female*4
	4	M20 female*4
—	A	Always A
Mounting bracket	-J	316 SST 2-inch Horizontal Pipe Mounting
	-K	316 SST 2-inch Vertical Pipe Mounting
	-N	None
—	A	Always A

*1: Applicable when Area Code is 3.

*2: Applicable when Area Code is 2 or 4.

*3: Applicable when Area Code is 4.

*4: Cable gland is not included. When 4 (M20 female) is selected, prepare the cable gland with a flat gasket.

OPTIONAL ACCESSORIES


Item	Parts Number	Description
Protection Cap	F9097ND	Rubber protective cap *

* The protective cap is used to temporarily protect the connector of the product when the XS110A is removed from XS550 for battery replacement, etc. When the XS110A is removed from the product, waterproof and dustproof performance cannot be guaranteed.


■ DIMENSIONS

● 2-inch Horizontal Pipe Mounting


Unit: mm (approx. inch)

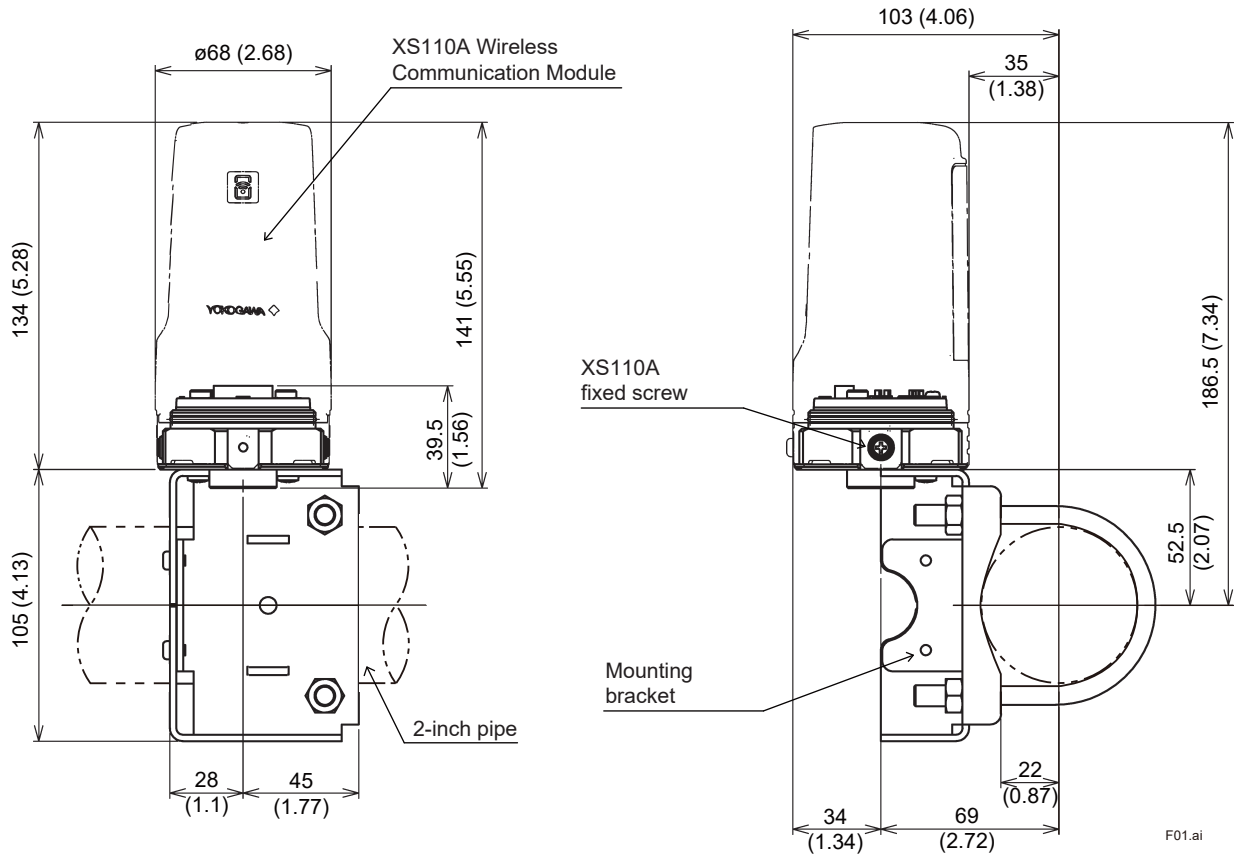

● 2-inch Vertical Pipe Mounting

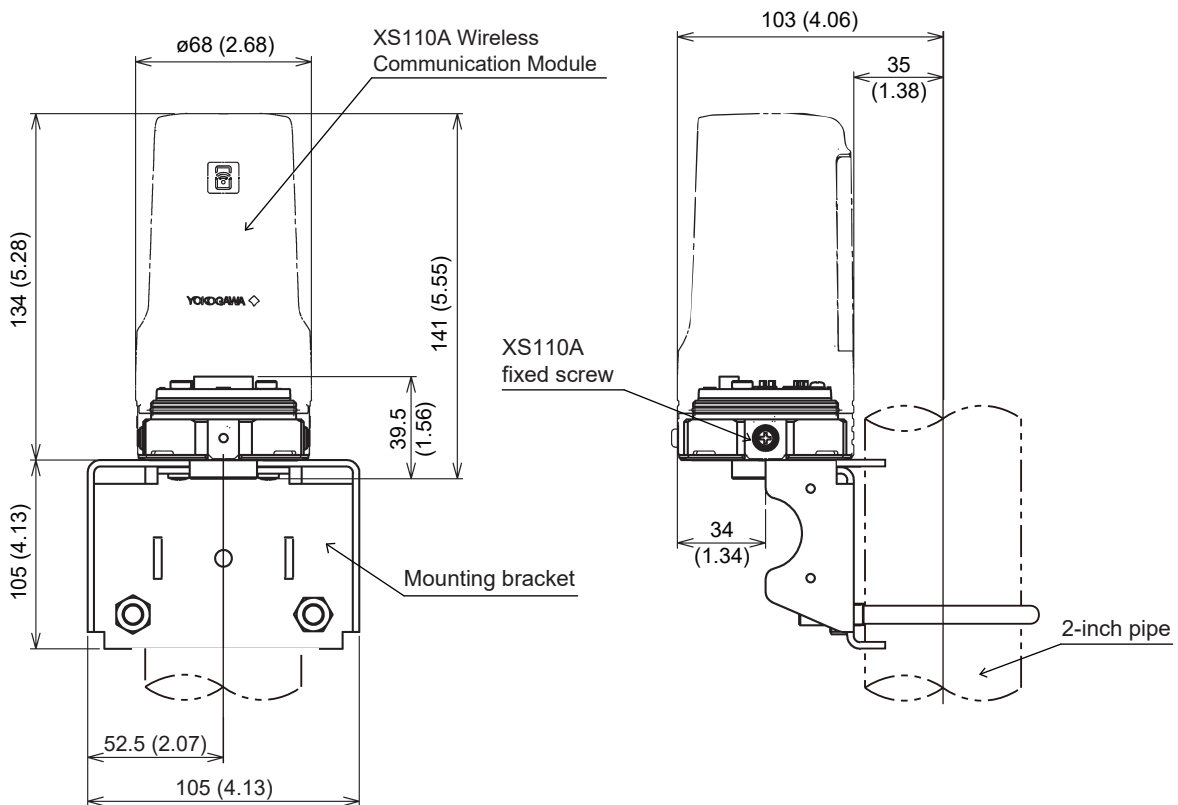


● Terminal Layout

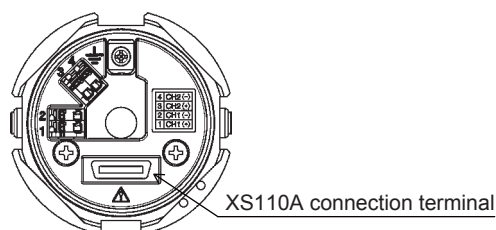

F03.ai

● Connection of input terminal

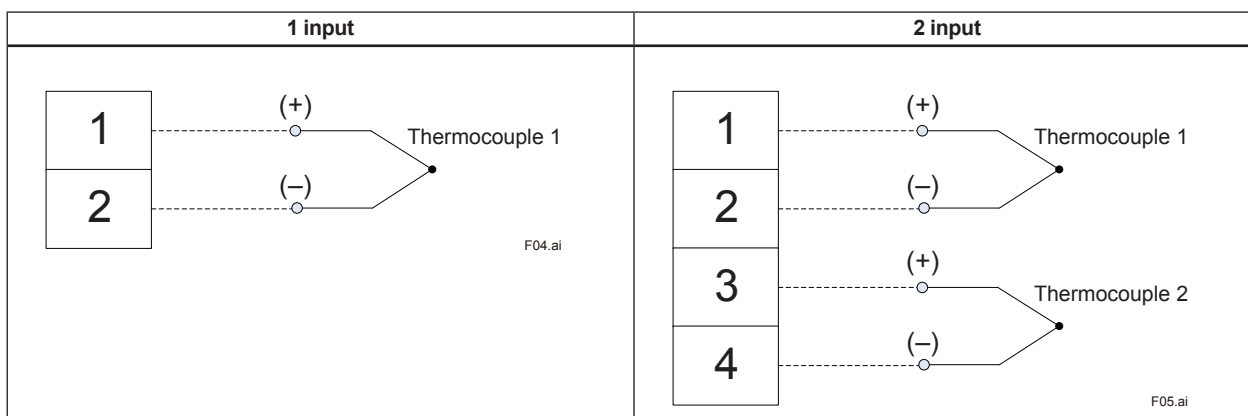

<Ordering Information>

1. Model, suffix codes, and option code

<Related Products General Specifications>

XS110A Wireless Communication Module:

Refer to GS 01W06D01-01EN

<Trademarks>

- Sushi Sensor is a registered trademark or trademarks of Yokogawa Electric Corporation.
- Other company names and product names used in this material are registered trademarks or trademarks of their respective owners.
- In this document, the trademarks or registered trademarks are not marked with “™” or “®”.