





V110 FULLY RUGGED NOTEBOOK

- Enhanced Enterprise Security with optional Intel vPro, Windows Disk Encryption, TPM
 2.0 and many more multi-factor authentication options
- 10th Generation Intel® Core™ i7 / i5 vPro™ Processor
- 11.6" LumiBond® 2.0 Display with Getac Sunlight Readable Technology and Capacitive Touchscreen
- LifeSupport[™] battery swappable technology
- Optional Dual Mode Touchscreen (multi-touch and digitizer)














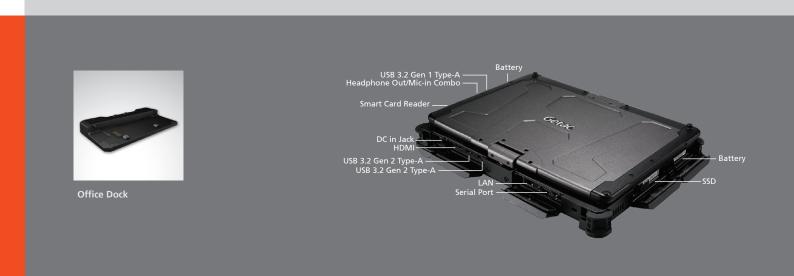

Specifications

Operating System

Windows 10 Pro

Mobile Computing Platform Intel® Core™ i5-10210U Processor 1.6GHz Max. 4.2GHz with Intel® Turbo Boost Technology - 6MB Intel® Smart Cache

Platform Options: Intel® Core™ i5-10310U vPro™ processor 1.7GHz Max. 4.4GHz with Intel® Turbo Boost Technology 6MB Intel® Smart Cache

Intel® Core™ i7-10510U Processor 1.8GHz Max. 4.9GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

Intel® Core™ i7-10610U vPro™ Processor 1.8GHz Max. 4.9GHz with Intel® Turbo Boost Technology - 8MB Intel® Smart Cache

VGA Controller

Intel® UHD Graphics

Display

11.6" IPS TFT LCD FHD (1920 x 1080) Protection film 800 nits LumiBond® display with Getac sunlight

readable technology Capacitive multi-touch screen

Storage & Memory 8GB DDR4

Optional: 16GB/32GB/64GB DDR4

256GB PCIe NVMe SSD

Optional: 512GB / 1TB SSD PCIe NVMe SSD

Keyboard

LED backlit membrane keyboard Optional: Rubber Keyboard

Pointing Device

Touchscreen

- Capacitive multi-touch screen Optional: Dual mode touchscreen (multi-touch and digitizer)

Touchpad
- Glide touchpad with left-click and right-click buttons

Expansion Slot

Smart Card Reader x 1

Optional: 1D/2D Imager Barcode Reader Optional: USB 3.2 Gen 2 Type-C x 1

I/O Interface

FHD webcam x 1 vii Headphone out/Mic-in Combo x 1

DC in Jack x 1 USB 3.2 Gen 1 Type-A x 1 USB 3.2 Gen 2 Type-A x 2 LAN (RJ45) x 1

Serial port (9-pin; D-sub) x 1
Docking Connector x 1
Optional: Windows Hello face-authentication camera (front-facing) x 1 vii

Optional: RF antenna pass-through for GPS, WLAN and WWAN

Optional: 8M pixels auto focus rear camera x 1

Communication Interface

10/100/1000 base-T Ethernet Intel® Wi-Fi 6 , AX200 802.11ax Bluetooth (v5.2) ⁱⁱ Optional: Dedicated GPS Optional: 4G LTE mobile broadband

Security Feature

TPM 2.0

Kensington Lock Optional: Intel® vPro™ Technology Optional: HF RFID and contactless Smart Card reader Opional: Fingerprint reader

AC Adapter (65W, 100-240VAC, 50/60Hz) Li-lon battery (11.1V, typical 2100mAh; min. 2040mAh) x 2

LifeSupport™ battery swappable technology

Dimension (W x D x H) & Weight 313 x 238 x 39mm (12.32 " x 9.37 " x 1.53 ") 2.1kg (4.63lbs) [™]

Rugged Feature

MIL-STD-810H certified IP65 certified MIL-STD-461G certified v Vibration & 4 feet (1.2m) drop resistant ^{xi} e-Mark certified for vehicle usage Optional: ANSI / UL 121201, CSA C22.2 NO. 213 ix Optional: Salt fog certified

Environmental Specification

Temperature vi

- Operating: -29°C to 63°C / -20°F to 145°F Storage: -51°C to 71°C / -60°F to 160°F
- Humidity: 95% RH, non-condensing

Pre-installed Software

Getac Utility Getac Camera Getac Geolocation Getac Barcode Manager viii Optional: Absolute Persistence®

Battery (11.1V, typical 2100mAh; min. 2040mAh) AC Adapter (65W, 100-240VAC) Capacitive Stylus

Optional:

Optional:
Carry Bag
Battery (11.1V, typical 2100mAh; min. 2040mAh)
Multi-Bay Charger (Dual Bay)
Multi-Bay Charger (Eight-Bay)
AC Adapter (65W, 100-240VAC)
Office Dock AC Adapter (90W, 100-240VAC)
MIL-STD-461 Certified AC Adapter (90W,

115-230VAC) Vehicle Adapter (120W, 11-32VDC)

Digitizer Pen Capacitive Stylus Protection Film

X Strap Shoulder Strap (2-point) Vehicle Dock Office Dock

100W Type-C Adapter x

Bumper-to-Bumper Warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

3 years Bumper-to-Bumper

- Smart Card reader, optional 1D/2D imager barcode reader and optional USB 3.2 Gen 2 Type-C are mutually exclusive. (USB 3.2 Gen 2
- Type-C is mutually exculsive with rear camera)
 Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is
- operating in the area. 13.56MHz Contactless HF RFID / NFC reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).

- compilant).
 Weight and dimensions vary from
 configurations and optional accessories.
 MIL-STD-461G 90W AC adapter sold separately.
 Tested by an independent third-party test lab
 following MIL-STD-810H.
- vii FHD webcam and optional Windows Hello face-authentication camera (front-facing) are
- mutually exclusive options.

 viii Available when barcode reader option is selected.

 ix Available with limited configurations.
- Do not support the configurations with Discrete Graphic Card.
 Drop test results vary from configurations and
- optional accessories.

Fully Rugged Notebook



Docking Solutions

	Vehicle Dock	Office Dock
Serial Port	2	2
External VGA	1	1
Microphone	1	1
Audio Output	1	1
DC in Jack	1	1
USB	4	4
LAN	1	1
HDMI	1	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	

Comm-Co B.V. Kreekzoom 9, 4561 GX, Hulst The Netherlands Tel: +31 114-370030 Email: info@comm-co.com

Communication today and tomorrow