

MC70S

ELECTRIC PICK & CARRY



II 3G IIB T4 Gc



STANDARD SPECIFICATIONS

Performance

Max Capacity	7.000-kg
Max Horizontal Outreach	5.5-m
Max Lifting Height	9.0-m
Dimensions (LxWxH) (mm)	3226 x 1380 x 1857 mm
Boom Angle	+65°/-10°
Rear Steering Angle	-90°/+90°
Weight With Counterweight	7.700-kg
Weight Without Counterweight	4.350-kg
Ground Bearing Pressure	14.5 kg/cm ²
Turning Radius (mm)	2844 mm

Power Source

Electrical System	72V DC
Batteries	36 x 2V, 640 amp-hr
Drive Motors	Dual Electric Motors AC 3.5kW 72V Insulation Class H

Tires

Standard Non-marking	Front nr. 2 superelastic 250-15" Rear nr. 2 superelastic 21x8-9"
----------------------	---

KEY SPECS

Max Capacity
7.000-kg

Dimensions (LxWxH)
3226 x 1380 x 1857 mm

Max Horizontal Outreach
5.5-m

Max Lifting Height
9.0-m

KEY FEATURES

- Front-wheel drive with counter rotation for maximum maneuverability
- Produces zero emissions, 100% environmentally friendly
- Tilting head 3 positions
- Removable Counterweight (3.000-kg)

ACCESSORIES & OPTIONS

- Hydraulic Winch 7.000-kg
- 1-m Manual Jib 4.000-kg
- 1.6-m Manual Jib Extension 2.500-kg
- 2-m Hydraulic Jib 2.500-kg
- 3-m Hydraulic Jib Extension 1.500-kg
- Hydraulic Forks 3.000-kg @ 500 mm

STANDARD FEATURES

- Electronic safe load indicator and tilting moment limiter
- Fixed Hook
- Automatic braking system on all wheels
- Radio Remote Control
- EU Standards CE
 - UNI ISO 4030-2: A1
 - 2006/42/CE- 2014/30 UE-
 - 2014-35 UE- 2000/14 and subsequent modification
 - EN 13000:2014 ANSI/ASME B30.5-2011 and subsequent modifications

MC70S

ELECTRIC PICK & CARRY




II 3G IIB T4 Gc



ATEX EQUIPMENT

DIMENSIONS

All dimensions are approximate

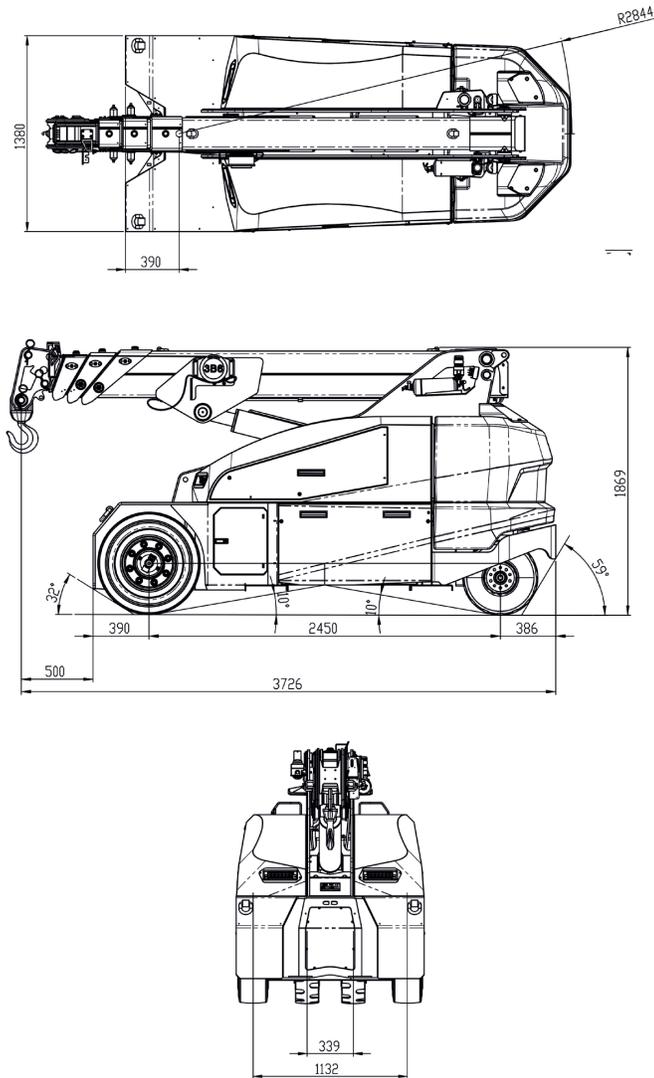

CAPACITY DIAGRAM*

*For additional diagrams please contact us

